



Product Data Sheet

MORTA-LOK FOR PLUMBERS

Blue Circle Southern's Morta-Lok for Plumbers is a proportioned mix of graded sand, cement binders and additives designed for instant repair applications.

The additives accelerate the setting time. It sets in approximately 15 minutes and is trafficable in one hour under normal conditions.

Features and Benefits

- Easy to use. Just add clean water.
- Suitable for all applications where time is of the essence.
- Can be used anywhere normal **Sand & Cement** mix is used.
- One hour compressive strength is equivalent to that at 1 day for normal **Sand & Cement** mix.
- Able to add up to 15kg of clean aggregate to the product to form a quicksetting concrete mix without adversely affecting the setting time.

Typical Applications

- Paving edge restraining
- Setting toilet pans
- Setting ceramic tiles
- General concrete and mortar repairs where a fast setting mortar is needed

Preparation

Before applying to any surface, remove any loose or flaky material and moisten with clean water.

Hot & Cold conditions

The setting time is dependent on the ambient and mixing water temperature. In extreme conditions adjust water temp. to suit. For hot weather – use colder water, and for colder conditions use warmer water.

Mixing

Empty portion required into a wheel barrow or other non porous surface (plastic bucket is good). Add water gradually and promptly mix thoroughly to achieve a workable mix. Do not mix more than can be placed in 5 minutes.

Do not over water. The less water the stronger the mortar.

Use **Morta-Lok for Plumbers** at once. DO NOT allow to stand.

Improved Bonding

For improved bonding of mortar mixes BCSC recommends the addition of a suitable bonding agent such as our own **"Bond 'n' Seal"**. This will help ensure a good bond to existing concrete and other surfaces and generally enhance the properties of the mix for any application.

Application


Apply the mixed **Morta-Lok for Plumbers** with a suitable trowel depending on the application.

Finish material immediately after placement, with either a clean sponge, wooden float or steel trowel.

Clean all tools and equipment promptly with water.

Typical Product Performance

Compressive Strength MPa:

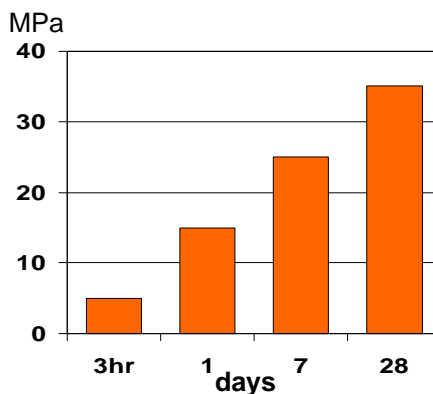

MORTA-LOK FOR PLUMBERS

Product Data Sheet

Curing

Moist cure using light water spraying for seven days to achieve maximum strength.

Yield

One 20kg bag will cover an area of 1.1m squared to depth of approximately 10mm.

Availability

BCSC Morta-Lok for Plumbers comes in 20kg multi-walled paper sacks.

Cleanup & Storage

Clean all tools and equipment with water promptly after use.

Contact with air and moisture will cause hydration of cementitious products. Store in a cool dry place and seal any unused material. It is recommended to dispose of any cement based products over 12 months old.

Safe Handling

This product contains cement chemicals and trace amounts of Hexavalent Chromium. Avoid generating dust. Use personal protection equipment against exposure and alkali burns. Wash product off unprotected skin immediately with water. The use of goggles, dust masks, barrier creams and rubber gloves is recommended.

Manual handling of bagged products without proper training may result in personal injury. Wherever possible you should use mechanical aids or share the load with another person.

For further safety information consult the Blue Circle Southern Material Safety Data Sheet for the product.



For more information please contact:

Blue Circle Southern Cement Limited
ABN: 62 008 528 523
www.bluecirclesouthern cement.com.au

Clunies Ross Street, Prospect NSW 2148
P.O. Box 42 Wentworthville, NSW 2145
Telephone: (02) 9033 4000
Facsimile: (02) 9033 4055

Note: The information stated herein and all advice given should be taken as a guide only. Both are given in good faith and are to the best of our knowledge true and accurate and are intended to give a fair description of the product and its capabilities under specific test conditions. No guarantee of the accuracy or completeness of the information is made and persons receiving the information should make their own tests to determine suitability thereof in all respects for their particular purpose.